



American Water & Energy Savers

"Your building's greatest liquid asset" SM

4431 North Dixie Highway | Boca Raton, FL 33431

Toll Free: (800) 950-9058 | Office: (561) 361-4014 | Fax: (561) 361-4201

# Multi-Jet Water Meters

## 1-1/2" and 2"

## The perfect extension to our Multi-Jet line of meters.



Available in bolt-flange or threaded designs, our 1-1/2" and 2" Multi-Jet Water Meters are a great choice for a wide range of applications. With accuracy that extends into the lower flows that a turbine can't handle, compact size and multi-jet performance, they are hard to beat. Modular Register design means easy upgrades to newer reading technologies, without the cost of changing out the whole meter.

Our meters are designed with the future in mind as well. Choose from the many optional devices and you can create a modular reading system that has no equal. Remote Read? We can handle that. Wireless? We make it almost too easy. These meters are ready to work for you.

### FEATURES & BENEFITS

- Meets All AWWA Standards; NSF Certified
- Tamper Detection and Prevention
- High-Quality, Long-Life Parts
- Durable Basket Strainer Protects From Damage



### TECHNICAL SPECIFICATIONS:

**AWWA Standard** Meets or exceeds all sections of AWWA Standard C-708, most recent revision; Certified by NSF to NSF/ANSI Standard 61.

**Design/Operation** Velocity-type meter. Water, evenly distributed through multiple inlet ports, flows past an impeller in the measuring chamber, creating an impeller velocity directly proportional to water flow rate. The meter's register integrates velocity into totalized flow.

**Main Case** Choice of waterworks bronze case of 81% copper composition or EnviroBrass® II, 87% copper, low lead bronze. All main cases incorporates externally threaded ends and wrench pads to aid installation. Bronze register retaining rings are standard.

**Measuring Chamber** The measuring chamber housing and measurement element are constructed of a durable synthetic polymer and can easily be removed from the main case without removal of the meter from the line. The chamber housing is constructed in two parts to allow access to the impeller.

Measurement surfaces are not wear surfaces, providing sustained accuracy despite the presence of entrained solids in the water. A long-life, sapphire bearing serves as a wear surface, with balanced water flows minimizing bearing wear.

**Magnetic Drive** A reliable, direct magnetic drive provides linkage between measurement element and register. No intermediate gearing is required; no gearing is exposed to water.

**Register** Standard direct read, DIALOG® Reading System and Electrical Output Registers are available. A six wheel odometer is standard.

**Register Sealing** Direct read and DIALOG registers are permanently sealed, with a tempered glass lens, stainless steel base and wrap-around gasket to prevent intrusion of dirt or moisture.

**Register Units** Registration available in U.S. gallons, cubic feet or cubic metres.

**Test Circle** Large center sweep hand with ten clearly indicated gradations per minimum registration unit.

**Low Flow/Leak Indicator** Center mounted indicator with high sensitivity resulting from direct one to one linkage to the measuring element.



**Strainer** A rugged, 360-degree polymer basket strainer protects the critical measuring element from damage.

**Adjusting Port** Sealed after factory calibration. Port is accessible for utility recalibration, to compensate for inaccuracy in older meters without parts replacement.

**Tamper Detection** The Master Meter Multi-Jet adjusting port is sealed to prevent tampering and provides a visual indication of tampering attempts.

METER OPERATING CHARACTERISTIC/DIMENSION	1-1/2" Threaded	1-1/2" Flanged	2" Threaded	2" Flanged
Flow Rating (gpm)	100	100	160	160
Continuous Flow (gpm)	75	75	120	120
Normal Flow Range (gpm)	5-100	5-100	8-160	8-160
Low Flow (gpm)	1-1/2	1-1/2	2	2
Maximum Working Pressure (psi)	150	150	150	150
Maximum Working Temperature (°F)	122	122	122	122
Length (A below)	12-5/8"	13"	15-1/4"	17"
Width (B below)	5-3/8"	5-3/8"	5-3/4"	5-3/4"
Height, standard register with lid (C below)	6-3/4"	6-3/4"	7-5/8"	7-5/8"
Height with DIALOG register	7-1/2"	7-1/2"	8-3/8"	8-3/8"
Height, bottom to center line (D below)	1-3/4"	1-3/4"	2-3/4"	2-3/4"
Meter Casing Spuds, Nominal Thread Size* (E below)	2"	N/A	2-1/2"	N/A
Weight (pounds)	11	12	20	24
Carton Weight (pounds)	12	14	22	26

\*External Straight Threads

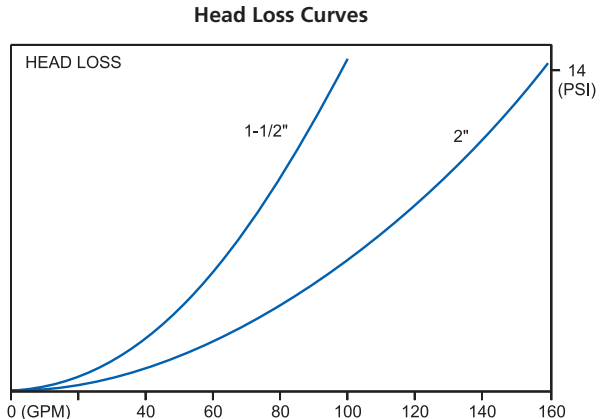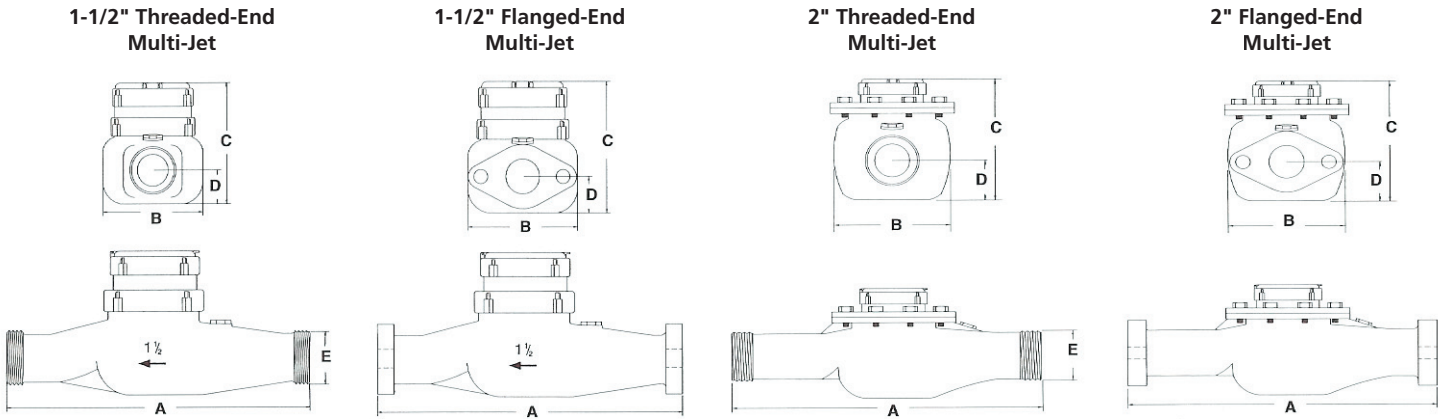

**Distributed by:**